


SECURE START® PERMEABLE

SYNTHETIC, BREATHABLE ROOFING UNDERLAYMENT

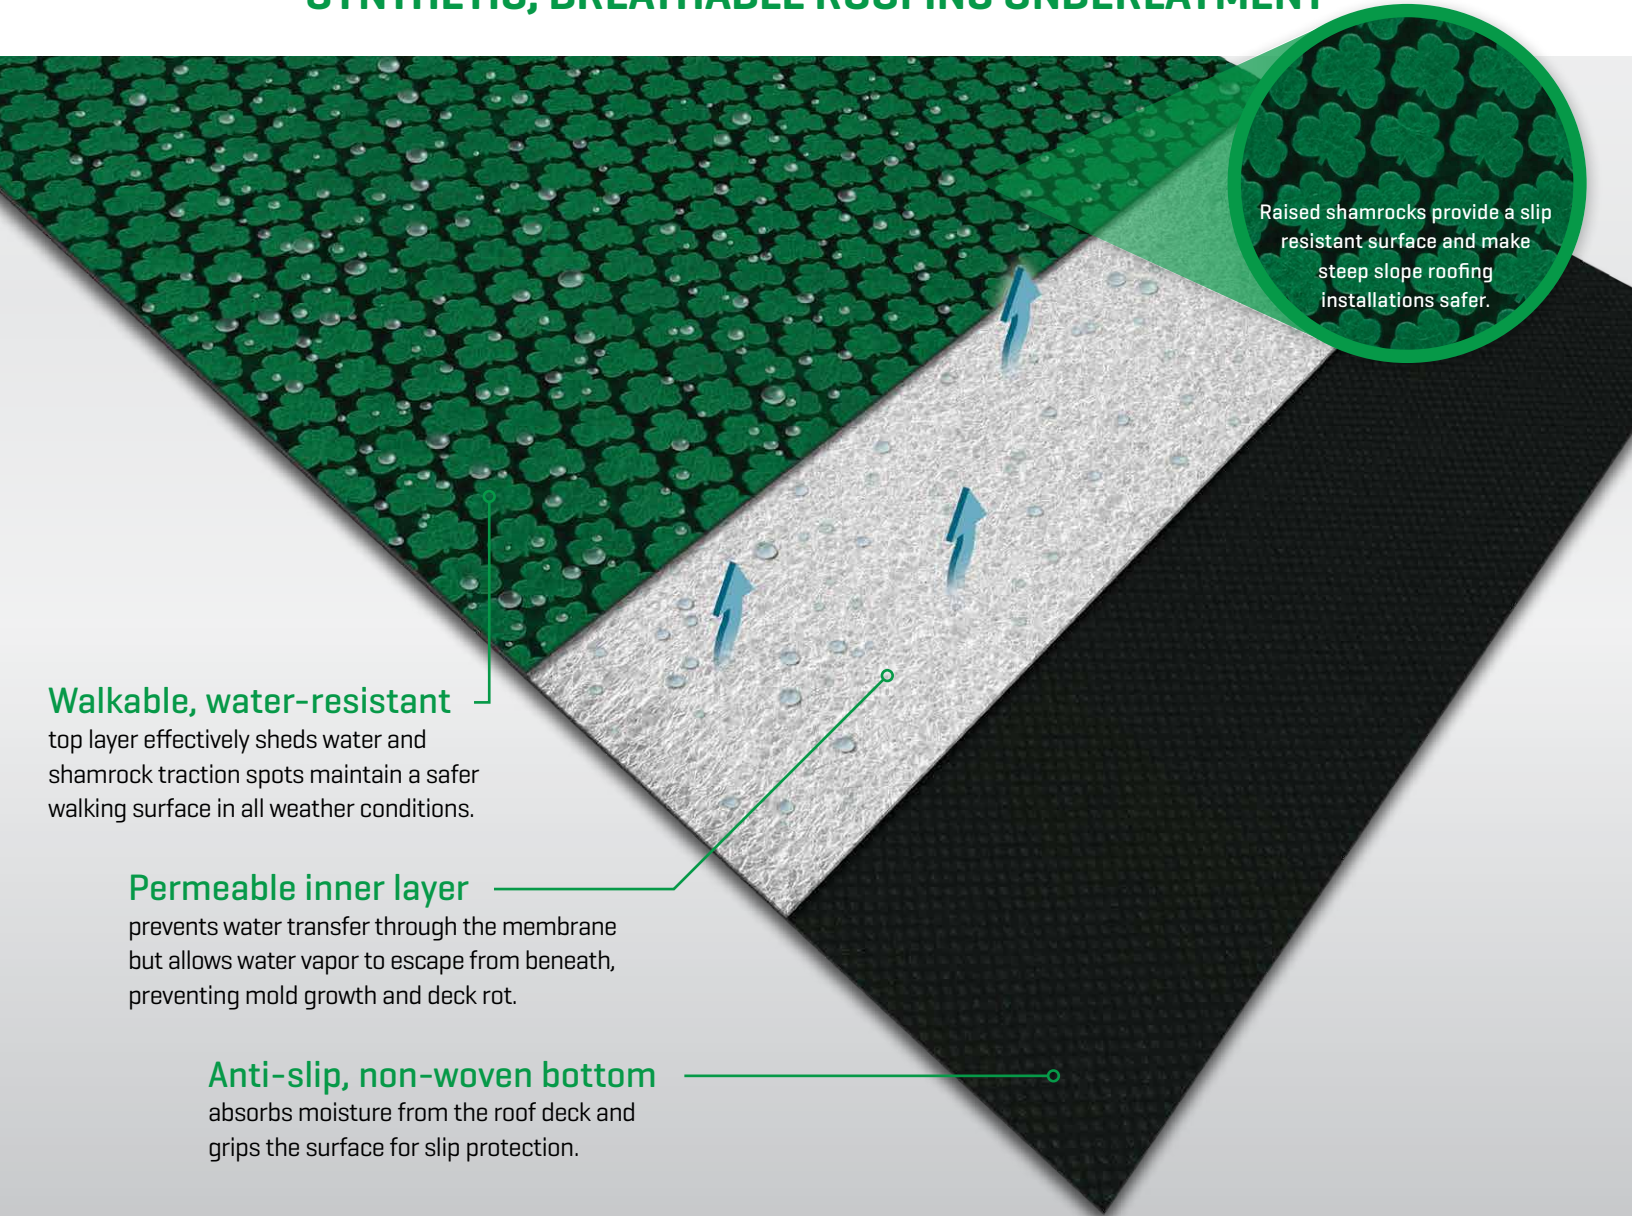

Raised shamrocks provide a slip resistant surface and make steep slope roofing installations safer.

Walkable, water-resistant

top layer effectively sheds water and shamrock traction spots maintain a safer walking surface in all weather conditions.

Permeable inner layer

prevents water transfer through the membrane but allows water vapor to escape from beneath, preventing mold growth and deck rot.

Anti-slip, non-woven bottom

absorbs moisture from the roof deck and grips the surface for slip protection.

Layers of Engineered Performance

Secure Start® Permeable synthetic underlayment is engineered for the ultimate defense from roof deck rot. Patented permeable technology removes moisture from a wet roof deck or poorly ventilated roof system, preventing premature roof deck decay and mold growth. The new Secure Start® Permeable is an ultra thick but lightweight, permeable underlayment that installs 25% faster than #30 traditional felt.

Secure Start® Permeable

- High strength, breathable, synthetic steep slope underlayment
 - Works under shingles, shakes, metal, and tile
 - ICC-ES AC188, ASTM D226 Type I & II, ASTM D4869, CAN/CSA A123.3, CCRR-1082, FBC FL23186
 - ASTM E108 Class A Fire Rating when installed with a Fire Rated Roof Covering
- Approx. Wt./Roll: 20 lbs. [9 kg]
Width: 48" [1.2 m]
Length: 125' [38.1 m]
Total Area/Roll: 5 squares
Rolls/Pallet: 36 from OR/CA/OK
Permeability Rating: 30 perms