




## Self-Adhering, NEX® Polymer Modified Underlayment for Ice and Water Protection



### 401 Arctic Seal®

- Approx. Wt./Roll: 60 lbs. (27.2 kg)
- Coverage: 2 squares (approx.)
- Width: 36" (0.91 m)
- Length: 65' (19.8 m)
- Thickness: 55 mils (nominal)
- Rolls/Pallet: 25 from OR/CA; 28 from OK
- ASTM D1970
- FM Approved

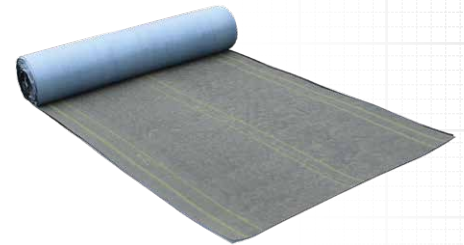

**Split-Release Film Allows Easy Application**


**Guards Against Ice Damming and Wind-Driven Rain**

**Modular; Serves Dual Role as a Flashing Membrane**

**Protects Entire Decks, Roof Perimeters and Valleys**

**Increased Walkability, Even in High Temperatures**

**Passed ASTM D5147 Compound Stability Testing up to 225°F (107°C) Without Failure**



### QUALITY DESIGN

Manufactured on a durable fiberglass mat, coated in SBS asphalt, and surfaced with a sand release agent. Underside has aggressive adhesive protected with split-release film.




### NEX® POLYMER MODIFIED ASPHALT

Asphalt technology increases flexibility, cold weather application, and tear strength.



### LOW SLOPE ROOFING APPLICATION

Installed with OmniSeal™ Cap as part of the DuoStik™ low slope system. Waterproof protection.



### WARRANTIES

- 10-year product warranty
- Optional *Accessory Warranty* when part of a greater roof system
- Eligible for *Concrete and Clay Tile Underlayment Warranty* for up to 20 years

