

Secure Start® HT


High Temperature Underlayment - Self-Adhering

Engineered with five layers for strength and durability, Secure Start® HT is a self-adhering, high temperature underlayment with superior thermal stability and adhesion properties from 40°F [4.4°C] to 250°F [120°C], making it **the right choice for complete deck coverage under metal roofing.**¹

Secure Start® HT can also be used under asphalt shingles, wood shakes, slate, or mechanically-fastened roof tiles, and is **recommended for high elevations, climates causing ice dams, and areas with high winds or wind-driven rain.**

INSTALLED FIRST

When installing a complete roof system, Secure Start® HT is installed first, prior to the starter shingles. Secure Start® HT can be used as either an ice & water barrier or high-performance, all-roof underlayment.



5 LAYER CONSTRUCTION


Provides thermal stability and greater tear strength than conventional underlayments. Synthetic sheet is manufactured with polypropylene while the underside is coated with an aggressive, asphalt-based adhesive. Release film protects the adhesive prior to application.

INCREASED WALKABILITY

Underlayment is constructed with a synthetic textured surface for improved walkability and safety vs. traditional roofing felts.

SOFT SURFACE

Polypropylene roll won't scratch metal during install.

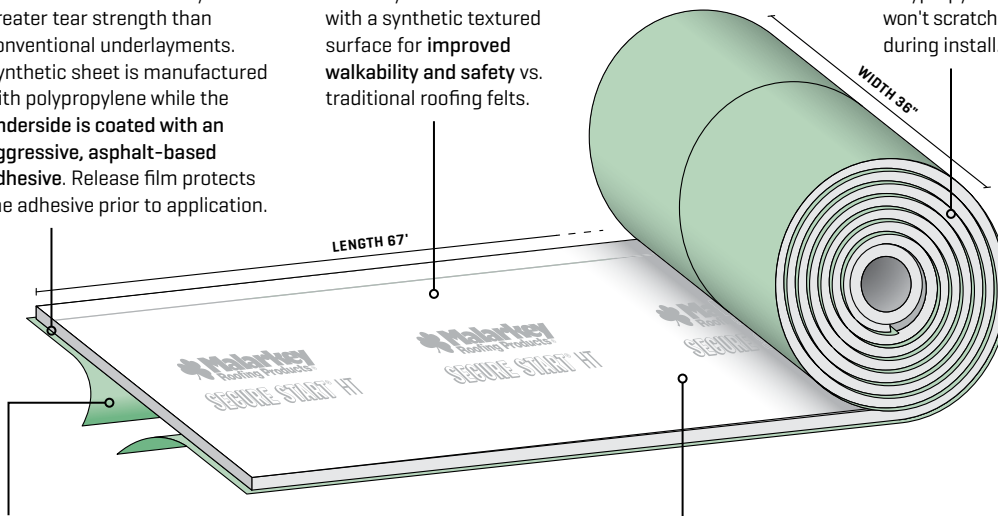

SELF-ADHERING APPLICATION

Split-release film for quick and easy installation. Self-sealing properties of the sheet provide protection against leaks around nails.

ADVANCED ADHESION


Among the industry's highest adhesion uplift rating for greater confidence the sheet will remain securely in place after installation.

100% WATERPROOF PERFORMANCE

Top layer effectively sheds water and can withstand six months of UV exposure.

MODULAR PRODUCT

Used on steep slope roofs to guard against ice damming and wind-driven rain, Secure Start® HT serves a dual role as a flashing membrane on valleys, roof-to-wall transitions, and around vents and skylights.



¹ Check with metal panel manufacturer for approval prior to installation.

Test Compliance - ASTM D1970, CCRR-1082, ASTM E108 Class A Fire Rating, and FBC FL41901. 406 Secure Start® HT carries a Limited Lifetime Warranty relative to its use as a single roofing accessory or in combination with Malarkey Limited Lifetime Warranty shingles and other accessory products in a complete Malarkey roofing system. For complete Warranty details, please visit www.malarkeyroofing.com/warranties.

This version supersedes all previous versions.
Rev. 02/26
www.malarkeyroofing.com
800-545-1191