

# RidgeFlex® Scotchgard™ Protector

## Low Profile Hip & Ridge Shingles - Aging, Algae, and Impact Resistant

RidgeFlex® Scotchgard™ Protector shingles are made with our patented **NEX® Polymer Modified (SBS Rubberized) Asphalt**, an innovative technology that infuses rubber and plastic polymers to strengthen the asphalt core of the shingle for superior impact resistance, granule adhesion, all-weather resilience, and aging longevity.


**RidgeFlex® Scotchgard™ Protector shingles are also sustainable**. Upcycled polymers from used tires and plastic bags improve durability and aging resistance, while helping reduce landfill waste. And smog-reducing granules help clean the air of emission pollutants, like planting trees on your roof. Sustainability without sacrificing performance.

### LOW PROFILE HIP & RIDGE

Adds slight roof dimension for subtle, enhanced curb appeal.

#### NEX® RUBBERIZED ASPHALT

Asphalt core of shingle is rubberized with virgin synthetic rubber polymers [SBS] to enhance shingle strength, flexibility, and aging resistance at the more vulnerable, high points of the roof. Class 4 impact rating. Insurance discounts may apply.

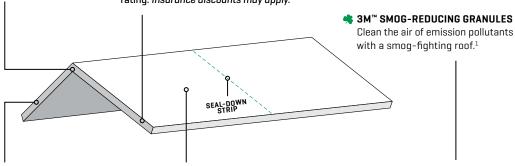

#### FIBERGLASS MAT

Provides structural reinforcement and tear strength.

#### **ROOFING GRANULES**

Deeply embedded, ceramic-coated granules protect shingle from weather and UV aging. Superior granule adhesion.

#### 3M™ COPPER GRANULES

**UPCYCLED RUBBER & PLASTIC** 

while diverting used tires and

plastic bags from the landfill.

Polymers from recycled rubber and

plastic improve shingle durability

Reduce black streaks caused by algae growth. Limited Lifetime algae warranty.

#### 烤 Malarkey Industry Firsts

<sup>1</sup> Source: Lawrence Berkeley National Laboratory and 3M.

Test Compliance – ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM E108 Class A Fire Rating, UL 2218 Class 4, CSA A123.5, and ICC Approval – ESR-3150. Disclaimer: Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. Before installation, five or six shingles should be laid out and reviewed for desired color. Colors and specifications subject to change without notice. Shingle colors not available in all regions. RidgeFlex\* shingles are designed to highlight certain hues in Malarkey shingles and may not always appear to be an exact match to the entire blend of the roof. Scotchgard and Scotchgard Protector, including the 3M logo, are all trademarks of 3M.

RidgeFlex® is eligible for expanded warranty coverages relative to its use as a single roofing accessory or in combination with others in a complete Malarkey roofing system. When installed with algae resistant shingles, RidgeFlex® is covered by Malarkey's Limited Lifetime Scotchgard™ Protector Warranty. Installed separately, it carries a 10-year product warranty against manufacturing defects. For complete Warranty details, please visit www.malarkeyroofing.com/warranties. This version supersedes all previous versions. Rev. 03/24

#### www.malarkeyroofing.com 800-545-1191





#### **INSTALLED FIFTH**


When installing a complete 5-component system, hip & ridge shingles are installed last, after the field (roofing) shingles.

#### **TWO PROFILE OPTIONS**

10" (254 mm) RidgeFlex® 12" (305 mm) RidgeFlex®

#### **COLOR MATCH**

Hip and ridge shingles match the color of selected field shingles



See shingle colors on a roof, or your roof, at www.malarkeyroofing.com/roof-designer.