

# DUOSTIK™ SYSTEM




The DuoStik™ System is a simple, cost-effective, self-adhered system for low slope roofs.

Designed for roof slopes greater than 1/4" to less than 4:12", this two-ply assembly delivers unparalleled durability for the low slope portion of your home or commercial building.



A perfect pairing of polymer modified (rubberized) roll products.

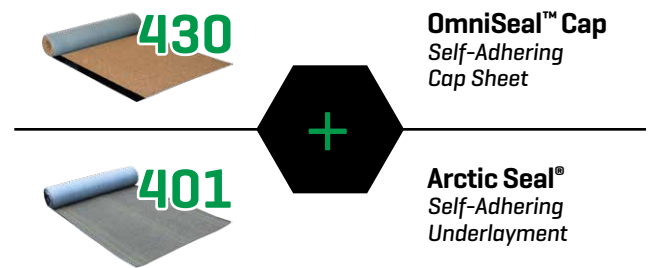

- ▶ System simplicity for easy installation
- ▶ Polymer modified (rubberized) asphalt
- ▶ Safe, walkable surface
- ▶ Self-adhered rolls using split-release film
- ▶ Impact-resistant, waterproof protection
- ▶ Enhanced granule adhesion



# Top your DuoStik™ System with your choice of OmniSeal™ Cap colors, matched to Malarkey shingles.



	401 ARCTIC SEAL®	430 OMNISEAL™ CAP
<b>Application Method</b>	Self-Adhered	Self-Adhered
<b>Asphalt Technology</b>	Polymer Modified Asphalt Technology	Polymer Modified Asphalt Technology
<b>Tear Strength</b>	Enhanced	Enhanced
<b>Thickness</b>	55 mils [1.4 mm]	115 mils [2.9 mm]
<b>Weight</b>	60 lbs [27.2 kg] per roll	78 lbs [35.4 kg] per roll
<b>Size</b>	36" x 65', Net 2 sq. [0.91 m wide x 19.8 m long]	39%" x 34', Net 1 sq. [1 m wide x 10.4 m long]



Easy-to-install roll assembly provides waterproof protection and meets UL 2218 Class 4 impact resistant standards when used as a system.



Malarkey Roofing Products® offers a 10 year Limited System Warranty for the DuoStik™ System. Visit [www.malarkeyroofing.com/warranties](http://www.malarkeyroofing.com/warranties) for more information. This version supersedes all previous versions. Rev. 07/22



P.O. Box 17217  
Portland, Oregon 97217  
800.545.1191  
[www.malarkeyroofing.com](http://www.malarkeyroofing.com)

