



VISTA® & VISTA® COOL

#### QUICK SPECS

Impact Rating	Class 4
Shingle Warranty*	Limited Lifetime
Non-Prorated Period	15 Years
Limited Wind Warranty	110 MPH
Enhanced Wind Warranty	130 MPH



#### Sustainable Performance®

*Superior Performance &  
Better for the Environment*

##### CRAFTSMANSHIP

Up to 2X Larger Nailing Area  
Up to 50% More Adhesive Bonds  
2X Rain Seals

##### PERFORMANCE

Up to 25% Greater Tear Strength  
Up to 65% Greater Granule Adhesion  
Class 4 Impact Rating

##### SUSTAINABILITY [PER ROOF]

Upcycles ~5 Rubber Tires  
Upcycles ~3,200 Plastic Bags  
Cleans Smog Pollution like ~2 Trees



Shown in Moonlit Black

## Vista® & Vista® Cool

### Architectural Shingles – Aging and Impact Resistant

Vista® & Vista® Cool shingles are made with our patented **NEX® Polymer Modified [SBS Rubberized] Asphalt**, an innovative technology that infuses rubber and plastic polymers to strengthen the asphalt core of the shingle for superior impact resistance, granule adhesion, all-weather resilience, and aging longevity.

**Vista® & Vista® Cool shingles are also sustainable.** Upcycled polymers from used tires and plastic bags improve durability and aging resistance, while helping reduce landfill waste. And smog-reducing granules help clean the air of emission pollutants, like planting trees on your roof.

*Sustainability without sacrificing performance.*


### BEST IN CLASS

Malarkey's Vista® & Vista® Cool shingles are *Best In Class* – made with the **industry's leading technology** [NEX® SBS rubberized asphalt], **highest impact rating** [Class 4], **strongest sustainability** [aging longevity, upcycled rubber & plastic, smog-reducing granules], and **superior warranty protection** for peace of mind.

## Color Options

See shingle colors on a roof, or your roof, at [www.malarkeyroofing.com/roof-designer](http://www.malarkeyroofing.com/roof-designer).

Colors available by shingle line: Vista [V] Vista Cool [VC]

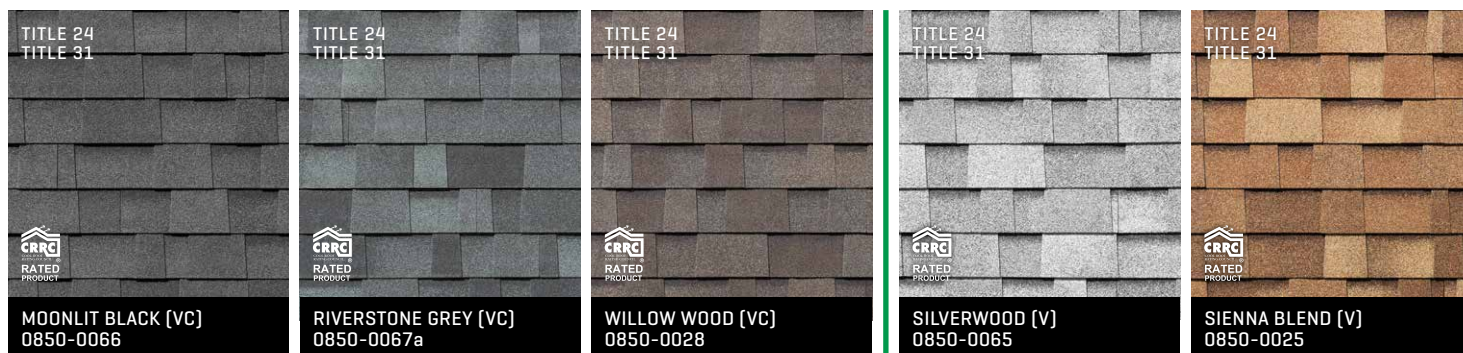

Licensed Manufacturer ID: 0850 Classification: Production Line	Moonlit Black	Riverstone Grey	Willow Wood	Silverwood	Sienna Blend
Solar Reflectance <sup>†</sup> [Aged]	0.20	0.20*	0.20	0.20	0.20
Thermal Emittance <sup>†</sup> [Aged]	0.92	0.92*	0.92	0.94	0.92
Solar Reflective Index <sup>†</sup> [SRI] [Aged]	20	20*	20	20	20
Related Product ID	0850-0066	0850-0067a	0850-0028	0850-0051	0850-0025

**Note:** CRRC-rated colors featured in this flyer can be used to comply with California Energy Code [CEC] Title 24, Part 6 and Los Angeles County, California Title 31 Cool Roof Requirements

<sup>†</sup> Results are CRRC listings unless marked otherwise.

\* Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.

## Performance Engineered, Sustainably Designed

### NEX® RUBBERIZED ASPHALT

Asphalt core of shingle is rubberized with virgin synthetic rubber polymers [SBS] to enhance shingle strength, flexibility, and aging resistance. **Class 4 impact rating (highest rating possible).** Insurance discounts may apply.

### UPCYCLED RUBBER & PLASTIC

Polymers from recycled rubber and plastic improve shingle durability and aging resistance, while **diverting the equivalent of ~5 rubber tires and ~3,200 plastic bags from the landfill per roof.**<sup>1</sup>

### ADHESIVE BONDS

Synthetic rubber adhesive [SEBS] resists dry-out and delivers extreme seal-down strength against high winds, wind-driven rain, and delamination. **Up to 50% more laminate bonds and 2X the rain seals of standard shingles.**

### THE ZONE® LARGER NAILING AREA

**Up to 2X larger nailing area**, with longer and tapered shingle backing, dramatically improves installation accuracy, helps ensure nails secure BOTH shingle layers to help prevent blowoffs, and reduces the risk of leaks from troughing. **Up to 130 MPH wind warranty.**

### FIBERGLASS MAT

Provides structural reinforcement, and combined with polymer modified asphalt, **up to 25% greater tear strength than the industry standard [ASTM D3462].**

### 3M™ ROOFING GRANULES

Deeply embedded, ceramic-coated granules protect shingle from weather and UV aging. **Up to 65% greater granule adhesion than the industry standard [ASTM D3462].**

### SOLAR REFLECTIVE COLORS

Reflect sun's rays to reduce roof heat. SRI Ratings up to 20.

### 3M™ SMOG-REDUCING GRANULES

Clean the air of emission pollutants. **Each roof has the smog-fighting potential of ~2 trees.**<sup>2</sup>

Malarkey Industry Firsts



3M™ Smog-Reducing Granules



MEETS CSA A123.5 STANDARDS



<sup>1</sup> Assumes roof of 30 squares.

<sup>2</sup> Assumes roof of 30 squares. Source: Lawrence Berkeley National Laboratory and 3M.

**Test Compliance** – All Shingles – ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, ASTM E108 Class A Fire Rating, UL 2218 Class 4, CSA A123.5, ICC Approval – ESR-3150, and ICC-ES AC438. CRRC-rated colors featured in this flyer can be used to comply with California Energy Code [CEC] Title 24, Part 6 and Los Angeles County, California Title 31 Cool Roof Requirements [Vista® Cool in Moonlit Black, Riverstone Grey, and Willow Wood, and Vista® in Sienna Blend and Silverwood].

**Disclaimer:** Photographs of shingles may not accurately represent their true color or the variations of color blends that will appear on the roof. **Before installation, five or six shingles should be laid out and reviewed for desired color.** Colors and specifications subject to change without notice. Shingle colors not available in all regions.

+ For complete warranty information, please reference Malarkey's **Shingle and Accessory Warranty** available at [www.malarkeyroofing.com/warranties](http://www.malarkeyroofing.com/warranties).

This version supersedes all previous versions. Rev. 12/25  
[www.malarkeyroofing.com](http://www.malarkeyroofing.com)  
800-545-1191



Malarkey is part of the Amrize family of brands