

ENVIRONMENTAL PRODUCT DECLARATION

LEGACY[®] SCOTCHGARD[™] SHINGLES

LEGACY[®] SCOTCHGARD[™] SHINGLES
PORTLAND, OR FACILITY



Legacy[®] Scotchgard[™] is an architectural shingle line fortified with durable NEX[®] polymer r asphalt technology to promote superior granule adhesion and extreme weather protection, including Class 4 impact resistance. This product line includes the optional Scotchgard[™] Protector from 3M for added protection against black streaks caused by algae.



Malarkey Roofing Products[®] offers a family of shingle products designed with a goal of sustainability in focus through each step of the product's life cycle. From a shingle's manufacture to the end of its service life, Malarkey shingles are created for superior performance, reliability, and limited impact on the environment.

In the roofing business since 1956, Malarkey Roofing Products[®] is a company perpetuated by the success and foresight of previous and current generations. With a keen ability to innovate, the company has advanced modern roofing materials by engineering solutions to common roof problems. Today, Malarkey is dedicated to keeping its roofing materials out of the waste stream and preserving the quality of life on our planet.



ENVIRONMENTAL PRODUCT DECLARATION



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

| | |
|--|--|
| EPD PROGRAM AND PROGRAM OPERATOR NAME, ADDRESS, LOGO, AND WEBSITE | UL Solutions 333 Pfingsten Rd, Northbrook IL, 60062 www.ul.com www.spot.ul.com |
| GENERAL PROGRAM INSTRUCTIONS AND VERSION NUMBER | Program Operator Rules v 2.7 2022 |
| MANUFACTURER NAME AND ADDRESS | Malarkey Roofing Products, P.O. Box 17217, Portland, OR 97217 |
| DECLARATION NUMBER | 4791004914.107.1 |
| DECLARED PRODUCT & FUNCTIONAL UNIT OR DECLARED UNIT | 100 square meters of installed Legacy® Scotchgard™ shingles (Portland, OR Facility) |
| REFERENCE PCR AND VERSION NUMBER | Part A: Life Cycle Assessment Calculation Rules and Report Requirements UL Environment (December 2018, version 3.2) PCR Guidance for Building-Related Products and Services - Part B: Asphalt Shingles, Built-up Asphalt Membrane Roofing and Modified Bituminous Membrane Roofing EPD Requirements, v1.2, 24/05/2021 |
| CSI MASTERFORMAT | 07 31 13 |
| DESCRIPTION OF PRODUCT APPLICATION/USE | Steep-slope weatherproofing of roofs |
| PRODUCT RSL DESCRIPTION (IF APPL.) | Legacy® Scotchgard™ Shingles (Portland, OR Facility): 35 years |
| MARKETS OF APPLICABILITY | Residential and Commercial Markets |
| DATE OF ISSUE | April 1, 2024 |
| PERIOD OF VALIDITY | 5 Years |
| EPD TYPE | Plant-Specific, Product-Specific |
| RANGE OF DATASET VARIABILITY | n/a |
| EPD SCOPE | Cradle to grave |
| YEAR(S) OF REPORTED PRIMARY DATA | 2019 |
| LCA SOFTWARE & VERSION NUMBER | GaBi v2021.2 |
| LCI DATABASE(S) & VERSION NUMBER | GaBi database Schema 8007 Content version 2021.2 |
| LCIA METHODOLOGY & VERSION NUMBER | TRACI 2.1; CML 4.2 |
| The PCR review was conducted by: | UL Solutions PCR Review Panel epd@ul.com |
| This declaration was independently verified in accordance with ISO 14025: 2006. The UL Environment "Part A: Calculation Rules for the Life Cycle Assessment and Requirements on the Project Report," v3.2 (December 2018), in conformance with ISO 21930:2017, serves as the core PCR. <input type="checkbox"/> INTERNAL <input checked="" type="checkbox"/> EXTERNAL | <i>Cooper McCollum</i> Cooper McCollum, UL Solutions |
| This life cycle assessment was conducted in accordance with ISO 14044 and the reference PCR by: | Sustainable Solutions Corporation |
| This life cycle assessment was independently verified in accordance with ISO 14044 and the reference PCR by: | <i>Lindita Bushi</i> Lindita Bushi, PhD, Athena Sustainable Materials Institute |

LIMITATIONS

Exclusions: EPDs do not indicate that any environmental or social performance benchmarks are met, and there may be impacts that they do not encompass. LCAs do not typically address the site-specific environmental impacts of raw material extraction, nor are they meant to assess human health toxicity. EPDs can complement but cannot replace tools and certifications that are designed to address these impacts and/or set performance thresholds – e.g. Type 1 certifications, health assessments and declarations, environmental impact assessments, etc.

Accuracy of Results: EPDs regularly rely on estimations of impacts; the level of accuracy in estimation of effect differs for any particular product line and reported impact.

Comparability: Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance of shingles using EPD information shall be based on the product's use and impacts at the construction works level, and therefore EPDs may not be used for comparability purposes when not considering the construction works energy use phase as instructed under this PCR. Full conformance with the PCR for shingles allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category Part B PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared.



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

1. Product Definition and Information

1.1. Description of Company/Organization

In the roofing business since 1956, Malarkey Roofing Products® is a company perpetuated by the success and foresight of previous and current generations. With a keen ability to innovate, the company has advanced modern roofing materials by engineering solutions to common roof problems. Today, Malarkey is dedicated to keeping its roofing materials out of the waste stream and preserving the quality of life on our planet.

Malarkey manufactures asphalt shingles in three different facilities including: Portland, OR; Southgate, CA; and Oklahoma City, OK. All three of Malarkey's asphalt roofing facilities have achieved the Waste Diversion from Landfill certification from GreenCircle Certified, LLC, demonstrating responsible management of end-of-life materials. GreenCircle provides third-party certification of sustainability claims through a rigorous scientific evaluation based on internationally recognized standards and guidelines.

1.2. Product Description



Figure 1 - Legacy® Scotchgard™

Legacy® Scotchgard™ Shingle Line

Legacy® Scotchgard™ is an architectural shingle fortified with durable NEX® polymer modified asphalt technology to promote superior granule adhesion and extreme weather protection, including Class 4 impact resistance. This shingle includes Scotchgard™ Protector from 3M for added protection against black streaks caused by algae.

Product Identification: 273

Product Specification: ASTM D7158 Class H, ASTM D3462, ASTM D3161 Class F, ASTM D3018 Type I, UL 2218 Class 4, CSA A123.5, ICC Approval – ESR-3150, ICC-ES AC438, FBC Approval - #14809, Listed in various fire assemblies.

Manufacturing Location: Portland, OR

1.3. Application

Steep-slope roofing systems are installed on roofs with slope equal to or greater than 2:12. Steep-slope roofing systems are primarily used to protect residential and light commercial construction from the weather. Asphalt shingle roofing systems provide protection against wind, rain, snow, and extreme temperatures.

1.4. Material Composition

The raw material composition of the Legacy® Scotchgard™ product line can be found in the table below. The amounts of each of the raw material inputs listed correspond to the declared unit amount. These are production-weighted amounts, which have been averaged across the three facilities modeled in this LCA.





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

Table 1 - Raw Material Composition of Legacy® Scotchgard™ Product Line (100 m²)

| PRODUCT | LEGACY® SCOTCHGARD™ |
|---------------------------|---------------------|
| Asphalt | 10%-30% |
| Recycled Rubber | 0%-5% |
| Styrene Butadiene Styrene | 0%-5% |
| Fiberglass Mat | 0%-5% |
| Granules | 30%-40% |
| Limestone | 30%-40% |
| Sand | 5%-15% |
| Others | 0.5%-5% |

1.5. Technical Requirements

The appropriate ASTM and CSA product specifications are provided below for each of the products modeled in this LCA.

Table 2 - Technical Data

| PRODUCT | SPECIFICATIONS |
|---------------------|--|
| Legacy® Scotchgard™ | Codes: Legacy TM meets the requirements of ASTM D3018 Type I, ASTM D3161 Class F, ASTM D3462, ASTM D7158 Class H, ASTM E108 Class A, and CSA A123.5. ICC Evaluation Report ESR 3150 Warnock-Hersey listed. |

1.6. Properties of Declared Product as Delivered

The product(s) declared in this document comply the standards listed in Table 2. For more information, the final evaluation report/certification/registration is available at: <https://www.malarkeyroofing.com/>

2. Methodological Framework

2.1. Functional Unit

The functional unit for this study is 100 square meters of constructed (i.e. installed) shingles. No underlayment or other roofing system products are included within this scope. A reference service life of 35 years is assumed for the shingles; the life of the building is assumed to be 75 years. However, varying conditions may impact this lifetime. Fasteners are included in the installation stage of this study.

Table 3 - Functional Unit Properties

| NAME | LEGACY® SCOTCHGARD™ | UNIT |
|--------------------------------------|---------------------|----------------|
| Functional Unit | 100 | m ² |
| Mass | 1,485 | kg |
| Thickness to achieve Functional Unit | 6.1 | mm |

2.2. System Boundary

This EPD covers the full cradle-to-grave life-cycle stages of the Legacy® Scotchgard™ product line. This EPD encompasses raw material extraction and processing, product manufacturing and installation, use, and material





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

disposal. Transportation between stages is accounted for, including raw material transportation to the manufacturing facility, finished product transportation to the construction site, and transport of the roof system at the end-of-life to the landfill. Use, maintenance, repair, replacement, and refurbishment are also included in this evaluation. In addition, production, manufacture and construction of manufacturing equipment and infrastructure, repair and maintenance of the production system, energy and water use related to company management and sales, delivery vehicles and laboratory equipment, and maintenance and operation of support equipment are all outside of the scope of this study. As an adaptation of the PCR, Table 4 below indicates the particular life-cycle stages and individual modules included within the system boundaries of the underlying LCA study. For each of the life-cycle stages, the individual modules that have been included are indicated with an X.

Table 4 - Life-cycle Stages and Modules Included in the System Boundaries

| Product Stage | | | Construction Stage | | Use Stage | | | | | End-of-Life Stage | | | |
|----------------------|-----------|---------------|--------------------|--------------|-----------|-------------|--------|-------------|---------------|-------------------|-----------|------------------|----------|
| A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | C1 | C2 | C3 | C4 |
| Raw materials supply | Transport | Manufacturing | Transport | Installation | Use | Maintenance | Repair | Replacement | Refurbishment | De-construction | Transport | Waste processing | Disposal |
| X | X | X | X | X | X | X | X | X | X | X | X | X | X |

Capital goods and infrastructure flows have been excluded from the unit processes used to model the LCIA, as these goods do not significantly impact the LCA.

2.3. Production Specific Calculations of Use Phase (Modules B1-B7)

Minimal maintenance is required during the product’s service life. The product typically lasts 35 years, at which time replacement of the shingle is required.

These products utilize 3M™ Smog-Reducing Granules that absorb smog-inducing chemicals, such as NOx. The use phase (B1) includes the effects of these granules that are integrated into the product line. The B2, B3, B5, B6, and B7 life cycle stages are assumed to be null.

2.4. Reference Service Life and Estimated Building Service Life

The estimated service life of the Legacy® Scotchgard™ shingles product line is 35 years. The service life of a product may depend on the environmental conditions where the product is being used, and in particular the service temperature. The building service life is assumed to be 75 years; therefore, 1.1 product replacements are included.

2.5. Allocation

Manufacturing values were obtained from the Portland, OR facility.

Whenever allocation was necessary, the method chosen was based upon the nature and purpose of the process. Allocation calculations that were made are consistent with the data quality and availability as well as the allocation method used. The physical relationship between flows (mass) was used to conduct allocation whenever applicable.

This LCA follows an attributional approach as outlined in ISO 21930 Section 7.1.1 with no impact assigned to pre- and post-consumer recycled materials entering or leaving the system.





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

2.6. Cut-off Rules

The cut-off criteria used in the underlying LCA, the results of which are declared in this EPD, follow the guidelines set forth in the PCR and have been reproduced as follows:

- *Mass: If a flow is less than 1% of the cumulative mass of the model flows, it may be excluded, provided its environmental relevance is minor.*
- *Energy: If a flow is less than 1% of the cumulative energy of the system model, it may be excluded, provided its environmental relevance is minor.*
- *Environmental relevance: Material and energy flows known to have the potential to cause significant emissions into air, water, or soil related to the environmental indicators of these PCR shall be included even if such flows meet the above criteria for Mass and Energy.*
- *At least 95% of the energy usage and mass flow shall be included and the life-cycle impact data shall contain at least 95% of all elementary flows that contribute to each of the declared category indicators.*
- *A list of hazardous and toxic materials and substances shall be included in the inventory and the cutoff rules do not apply to such substances.*

Following the cut-off criteria listed above, the energy required to install the fasteners onto the roofing shingle has been excluded as the overall electrical consumption of a nail gun is much less than the energy required to produce the materials. All reported data were incorporated and modeled using best available LCI data.

2.7. Data Sources

The following data sources were used to develop the LCIA from the inventory data collected.

Table 5 - Data Sources

| PRODUCT | DATABASE |
|---------------------------|-----------------------------------|
| Asphalt | GaBi v2021.2 |
| Recycled Rubber | GaBi v8.7 and Cut-Off Methodology |
| Styrene Butadiene Styrene | GaBi v2021.2 |
| Fiberglass Mat | GaBi v2021.2 |
| Granules | GaBi v2021.2 |
| Limestone | GaBi v2021.2 |
| Sand | GaBi v2021.2 |
| Others | GaBi v2021.2 |
| Electricity | GaBi v2021.2 |
| Natural Gas | GaBi v2021.2 |
| Waste | GaBi v2021.2 |

2.8. Data Quality

As the relevant foreground data is primary data or modeled based on primary information sources of the owner of the technology, no better precision is reachable within this product. Seasonal variations and variations across different manufacturers were balanced out by using yearly averages and weighted averages. All primary data were collected with the same level of detail, while all background data were sourced from GaBi 2021 databases. Allocation and other methodological choices were made consistently throughout the model.





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

2.9. Period Under Review

The period under review spans from October 2018 to September 2019.

2.10. Comparability and Benchmarking

EPDs. Environmental declarations from different programs (ISO 14025) may not be comparable. Comparison of the environmental performance of shingles using EPD information shall be based on the product’s use and impacts at the construction works level, and therefore EPDs may not be used for comparability purposes when not considering the construction works energy use phase as instructed under this PCR. Given this PCR ensures products meet the same functional requirements, comparability is permissible provided the information given for such comparison is transparent and the limitations of comparability explained. Full conformance with the PCR for shingles allows EPD comparability only when all stages of a life cycle have been considered, when they comply with all referenced standards, use the same sub-category Part B PCR, and use equivalent scenarios with respect to construction works. However, variations and deviations are possible. Example of variations: Different LCA software and background LCI datasets may lead to differences results for upstream or downstream of the life cycle stages declared. EPDs shall not contain statements of the superiority of one product over a competitive product that performs the same functions.

2.11. Estimates and Assumptions

For recycled content, the cut-off recycling methodology was utilized. Installation scrap rates of 5% were assumed, although this can vary at each job site. The lifetime was determined by detailed surveys of installed shingles.

3. Technical Information and Scenarios

3.1. Manufacturing

Figure 2 below shows the manufacturing process for asphalt shingles at the Portland, OR facility. Materials such as asphalt, sand, limestone, polymers, and fiberglass mats are transported to the production facility where the raw materials are staged. Then, asphalt and polymers are mixed and undergo limestone heating. The fiberglass mats are put into place so that the asphalt mixture can be applied to each mat followed by an application of sand and granule. The sheets are then pressed and cooled with water. The paint line and wind sealant are then applied to the cooled shingles along with release soap. The shingles then get patterns cut into their webs followed by an application of laminate adhesive. The webs then have to be realigned and pressed before the shingles can be cut. The shingle bundles are then stacked and packed for distribution.

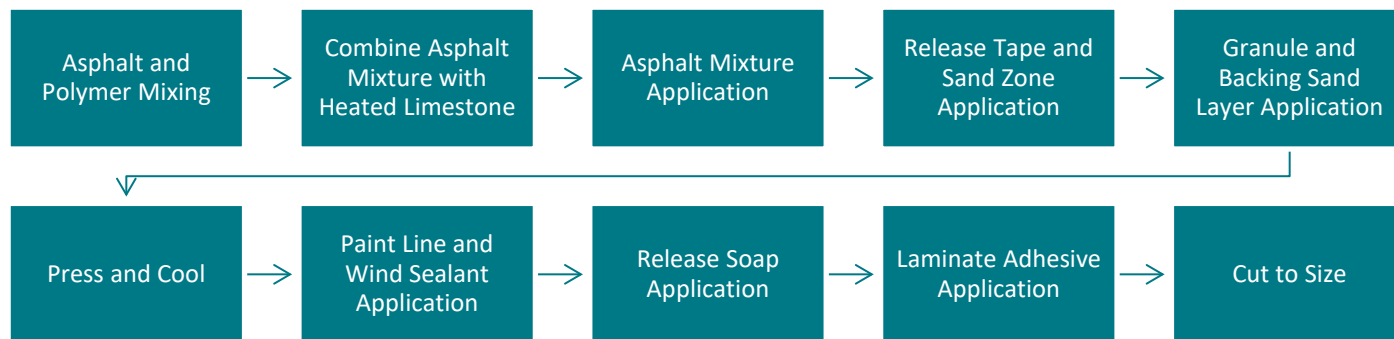


Figure 3 –Shingle Production Diagram





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

3.2. Packaging

The packaging materials include wood pallets, polyethylene strapping, and polyethylene wrap. Upon arrival at the construction site, packaging materials are discarded. These materials were assumed to be landfilled in the installation stage (A5).

3.3. Transportation

The following table details the transportation of the product to the building site.

Table 6 - Transport to the Building Site (A4)

| NAME | LEGACY® SCOTCHGARD™ | UNIT |
|--|------------------------------------|-------------------|
| Fuel type | Diesel | - |
| Liters of fuel | 36.2 | l/100km |
| Vehicle type | Tractor Trailer, Rail, Ocean | - |
| Transport distance (truck) | 1,170 | km |
| Transport distance (rail) | 36 | km |
| Transport distance (ocean) | - | km |
| Capacity utilization (including empty runs, mass based) | 90% | % |
| Gross density of products transported | 2300 | kg/m ³ |
| Capacity utilization volume factor (factor: =1 or <1 or ≥ 1 for compressed or nested packaging products) | 1 | - |



ENVIRONMENTAL PRODUCT DECLARATION



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

3.4. Product Installation

Shingles are installed with nails starting from the eave edge to the ridge of the roof. For this EPD, the only product being observed are the asphalt shingles. A 5% scrap rate is assumed during the installation of asphalt shingles. Additionally, packaging waste is generated and assumed to be landfilled.

Table 7 - Installation

| NAME | LEGACY® SCOTCHGARD™ | UNIT |
|--|---|--------------------|
| Ancillary materials | 1.10E+01 | kg |
| Net freshwater consumption specified by water source and fate (amount evaporated, amount disposed to sewer) | - | m ³ |
| Other resources | - | kg |
| Electricity consumption | - | kWh |
| Other energy carriers | - | MJ |
| Product loss per functional unit | 7.43E+01 | kg |
| Waste materials at the construction site before waste processing, generated by product installation | 9.96E+01 | kg |
| Output materials resulting from on-site waste processing (specified by route; e.g. for recycling, energy recovery and/or disposal) | Construction & Demolition Waste: 7.3E+01 Packaging: 2.53E+01 | kg |
| Biogenic carbon contained in packaging | 1.22E+01 | kg CO ₂ |
| Direct emissions to ambient air, soil and water | - | kg |
| VOC content | n/a | µg/m ³ |

3.5. Use

The following table provides information regarding the reference service life of the Legacy® Scotchgard™ product lines. These products utilize 3M™ Smog-Reducing Granules that harness sunlight to photocatalytically convert smog (NO, NO₂) into water-soluble ions (NO₃), actively reducing air pollution. An analysis was conducted showing the benefits of these granules that are integrated into the product line under life cycle stage B1. B2, B3, B5, B6, and B7 are assumed to be null.

Table 8 - Reference Service Life

| Name | Legacy® Scotchgard™ | Unit |
|---|---|-------|
| RSL | 35 | years |
| Declared product properties and finishes, etc. | Please refer to the installation guides below: https://malarkeyroofing.com/resources/installation-guides | |
| Design application | | |
| An assumed quality of work, when installed in accordance with the manufacturer's instructions | | |
| Outdoor environment | Please visit https://malarkeyroofing.com/ for more information. | |
| Indoor environment | n/a | |
| Use conditions | Please visit https://malarkeyroofing.com/ for more information. | |
| Maintenance | n/a | |





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

Table 9 - Replacement (B4)

| NAME | LEGACY® SCOTCHGARD™ | UNIT |
|---|---|-----------------|
| Reference service life | 35 | years |
| Replacement cycle | 1.14 | Number/ ESL - 1 |
| Energy input, specified by activity, type and amount | - | kWh |
| Net freshwater consumption specified by water source and fate | - | m ³ |
| Replacement of worn parts, specify parts/materials | Asphalt shingle: 1.49E+03 per replacement | kg |
| Direct emissions to ambient air, soil and water | n/a | kg |

3.6. Disposal

Upon the end of the product service life, the products are removed from the building roof. Some products may be recycled at end of life, but primary data is not available to quantify the percentage, so in this study the assumption was made that 100% of the product is sent to a landfill. C1 and C3 are assumed to be null.

Table 10 - End of Life

| NAME | | LEGACY® SCOTCHGARD™ | UNIT |
|--|--|--|--------------------|
| Assumptions for scenario development (description of deconstruction, collection, recovery, disposal method and transportation) | | Products are manually removed from the roof and typically combined with construction and demolition waste. | |
| Collection process (specified by type) | Collected separately | - | kg |
| | Collected with mixed construction waste | 1,485 | kg |
| Recovery (specified by type) | Reuse | - | kg |
| | Recycling | - | kg |
| | Landfill | 1,485 | kg |
| | Incineration | - | kg |
| | Incineration with energy recovery | - | kg |
| | Energy conversion efficiency rate | - | |
| Disposal (specified by type) | Product or material for final deposition | Asphalt shingle: 1,485 | kg |
| Removals of biogenic carbon (excluding packaging) | | - | kg CO ₂ |

3.7. Re-use Phase

While the re-use of shingles is not assumed, recycling of shingles is feasible. Shingles can be recycled, and often are used in asphalt mixes depending upon various states' requirements. Shingles also may provide energy benefit in waste-in-energy incineration facilities.





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

4. Legacy® Scotchgard™ Environmental Indicators Results

4.1. Life Cycle Impact Assessment Results

Results are reported based on characterization factors from the US EPA Tool for the Reduction and Assessment of Chemical and Other Environmental Impacts (TRACI 2.1 impact categories). These six impact categories are globally deemed mature enough to be included in Type III environmental declarations. Other categories are being developed and defined, and LCA should continue making advances in their development. However, the EPD users shall not use additional measures for comparative purposes. Additionally, impact categories taken from the University of Leiden (CML) methodology are reported to facilitate the use of this EPD outside of North America.

LCA results are presented per the functional unit (100 m² of asphalt shingles). Note that, at this point, the reported impact categories represent impact potentials, i.e., they are approximations of environmental impacts that could occur if the emissions would (a) follow the underlying impact pathway and (b) meet certain conditions in the receiving environment while doing so. Life Cycle Impact Assessment (LCIA) results are therefore relative expressions only and do not predict actual impacts, the exceeding of thresholds, safety margins, or risks.

Table 16 - Legacy® Scotchgard™ Portland, OR Facility North American Impact Assessment Results

| TRACI v2.1 IMPACT ASSESSMENT | ACRONYM | UNIT | A1-A3 | A4 | A5 | B1 | B4 | C2 | C4 |
|---------------------------------|---------|-----------------------|----------|----------|----------|-----------|----------|----------|----------|
| Global Warming Potential | GWP 100 | kg CO ₂ eq | 3.96E+02 | 1.63E+02 | 3.70E+01 | 0.00E+00 | 1.02E+03 | 1.11E+01 | 3.20E+02 |
| Ozone Depletion Potential | ODP | kg CFC-11 eq | 5.94E-07 | 6.15E-09 | 3.00E-08 | 0.00E+00 | 6.94E-07 | 4.18E-10 | 9.93E-13 |
| Acidification Potential | AP | kg SO ₂ eq | 1.59E+00 | 9.90E-01 | 1.89E-01 | -2.83E-02 | 5.44E+00 | 6.64E-02 | 2.11E+00 |
| Eutrophication Potential | EP | kg N eq | 1.41E-01 | 5.50E-02 | 3.10E-02 | 7.78E-03 | 1.08E+00 | 3.68E-03 | 7.52E-01 |
| Photooxidant Chemical Potential | POCP | kg O ₃ eq | 2.81E+01 | 2.74E+01 | 2.93E+00 | -1.00E+00 | 7.23E+01 | 1.83E+00 | 5.45E+00 |
| Fossil Fuel Depletion | FFD | MJ surplus | 1.01E+03 | 2.87E+02 | 6.60E+01 | 0.00E+00 | 1.57E+03 | 1.95E+01 | 4.07E+01 |

*Life Cycle Stages not shown have no potential environmental impact, i.e. an impact value of 0.

Table 17 - Legacy® Scotchgard™ Portland, OR Facility EU Impact Assessment Results

| CML v4.2 IMPACT ASSESSMENT | ACRONYM | UNIT | A1-A3 | A4 | A5 | B1 | B4 | C2 | C4 |
|--|---------|-------------------------------------|----------|----------|----------|-----------|----------|----------|----------|
| Global Warming Potential | GWP 100 | kg CO ₂ eq | 3.28E+02 | 1.63E+02 | 3.46E+01 | 0.00E+00 | 9.80E+02 | 1.11E+01 | 3.54E+02 |
| Ozone Depletion Potential | ODP | kg CFC-11 eq | 5.12E-09 | 6.14E-09 | 5.65E-10 | 0.00E+00 | 1.35E-08 | 4.17E-10 | 5.56E-11 |
| Acidification Potential | AP | kg SO ₂ eq | 9.61E-01 | 8.12E-01 | 1.13E-01 | -2.02E-02 | 3.08E+00 | 5.45E-02 | 8.56E-01 |
| Eutrophication Potential | EP | kg PO ₄ ⁻³ eq | 1.69E-01 | 1.45E-01 | 4.55E-02 | -1.21E-03 | 1.57E+00 | 9.71E-03 | 1.06E+00 |
| Photooxidant Chemical Potential | POCP | kg ethene eq | 1.25E-01 | 9.43E-02 | 1.75E-02 | -1.13E-03 | 5.23E-01 | 6.37E-03 | 2.32E-01 |
| Abiotic Depletion Potential (elements) | ADPE | kg Sb-eq | 7.25E-03 | 6.75E-08 | 3.63E-04 | 0.00E+00 | 8.38E-03 | 4.59E-09 | 6.06E-06 |
| Abiotic Depletion Potential (fossil fuels) | ADPF | MJ, LHV | 6.64E+03 | 2.07E+03 | 4.44E+02 | 0.00E+00 | 1.06E+04 | 1.41E+02 | 3.13E+02 |

*Life Cycle Stages not shown have no potential environmental impact, i.e. an impact value of 0.



ENVIRONMENTAL PRODUCT DECLARATION



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

Life Cycle Inventory Results

Table 18 - Legacy® Scotchgard™ Portland, OR Facility Resource Use

| RESOURCE | ACRONYM | UNIT | A1-A3 | A4 | A5 | B1 | B4 | C2 | C4 |
|---|-------------------|----------------|----------|----------|----------|----------|----------|----------|----------|
| Renewable Primary Energy for Energy Sources | RPR _E | MJ, LHV | 8.87E+02 | 0.00E+00 | 4.54E+01 | 0.00E+00 | 1.07E+03 | 0.00E+00 | 3.79E+01 |
| Renewable Primary Energy for Materials | RPR _M | MJ, LHV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Renewable Primary Energy Total | RPR _T | MJ, LHV | 8.87E+02 | 0.00E+00 | 4.54E+01 | 0.00E+00 | 1.07E+03 | 0.00E+00 | 3.79E+01 |
| Non-Renewable Primary Energy for Energy Sources | NRPR _E | MJ, LHV | 6.81E+03 | 2.09E+03 | 4.54E+02 | 0.00E+00 | 1.08E+04 | 1.42E+02 | 3.23E+02 |
| Non-Renewable Primary Energy for Materials | NRPR _M | MJ, LHV | 1.04E+03 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.15E+03 | 0.00E+00 | 0.00E+00 |
| Non-Renewable Primary Energy Total | NRPR _T | MJ, LHV | 7.85E+03 | 2.09E+03 | 4.54E+02 | 0.00E+00 | 1.19E+04 | 1.42E+02 | 3.23E+02 |
| Secondary Materials | SM | kg | 1.29E+01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.42E+01 | 0.00E+00 | 0.00E+00 |
| Renewable Secondary Fuels | RSF | MJ, LHV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-Renewable Secondary Fuels | NRSF | MJ, LHV | 3.23E+02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 3.55E+02 | 0.00E+00 | 0.00E+00 |
| Exported Renewable Energy | RE | MJ, LHV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Freshwater Consumption | FW | m ³ | 2.40E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 2.64E+00 | 0.00E+00 | 0.00E+00 |

*Life Cycle Stages not shown have no potential environmental impact, i.e. an impact value of 0.

Table 19 - Legacy® Scotchgard™ Portland, OR Facility Output Flows and Waste Categories

| WASTE PARAMETERS | PARAMETER | UNIT | A1-A3 | A4 | A5 | B1 | B4 | C2 | C4 |
|--|-----------|---------|----------|----------|----------|----------|----------|----------|----------|
| Hazardous Waste | HWD | kg | 2.46E-04 | 0.00E+00 | 1.23E-05 | 0.00E+00 | 2.84E-04 | 0.00E+00 | 8.06E-09 |
| Non-Hazardous Waste | NHWD | kg | 2.67E+01 | 0.00E+00 | 2.57E+01 | 0.00E+00 | 9.81E+02 | 0.00E+00 | 8.39E+02 |
| High-Level Radioactive Waste | HLRW | kg | 5.45E-02 | 0.00E+00 | 2.83E-03 | 0.00E+00 | 6.70E-02 | 0.00E+00 | 3.58E-03 |
| Intermediate/Low-Level Radioactive Waste | ILLRW | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Components for Reuse | CRU | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Materials for Recycling | MR | kg | 5.66E+01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 6.23E+01 | 0.00E+00 | 0.00E+00 |
| Materials for Energy Recovery | MER | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Recovered Exported Energy | EE | MJ, LHV | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

*Life Cycle Stages not shown have no potential environmental impact, i.e. an impact value of 0.





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

Table 20 - Legacy® Scotchgard™ Portland, OR Facility Carbon Emissions and Removals

| CARBON EMISSION/REMOVAL | ACRONYM | UNIT | A1-A3 | A4 | A5 | B1 | B4 | C2 | C4 |
|---|---------|--------------------|----------|----------|----------|----------|----------|----------|----------|
| Removals associated with biogenic carbon content of the bio-based product | BCRP | kg CO ₂ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Emissions associated with biogenic carbon content of the bio-based product | BCEP | kg CO ₂ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Removals associated with biogenic carbon content of the bio-based packaging | BCRK | kg CO ₂ | 4.48E+01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 4.92E+01 | 0.00E+00 | 0.00E+00 |
| Emissions associated with biogenic carbon content of the bio-based packaging | BCEK | kg CO ₂ | 0.00E+00 | 0.00E+00 | 4.48E+01 | 0.00E+00 | 4.92E+01 | 0.00E+00 | 0.00E+00 |
| Carbon emissions from calcination | CCE | kg CO ₂ | 2.18E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 2.40E+00 | 0.00E+00 | 0.00E+00 |
| Carbon removals from carbonation | CCR | kg CO ₂ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Emissions from combustion of waste from renewable sources used in production processes | BCEW | kg CO ₂ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Emissions from combustion of waste from non-renewable sources used in production processes. | CWNR | kg CO ₂ | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |

*Life Cycle Stages not shown have no potential environmental impact, i.e. an impact value of 0.

5. LCA Interpretation

Based on the results listed above, the life cycle environmental impacts are strongly driven by the replacements required for a 75-year life building. Outside of replacements, raw materials and installation scrap are significant drivers of the overall environmental impacts. For raw materials, the mat, granules and SBS are the largest contributors to the environmental impacts.

6. Additional Environmental Information

6.1. Environment and Health During Manufacture

Malarkey's Portland, OR facility has achieved the Waste Diversion from Landfill certification from GreenCircle, demonstrating responsible management of end-of-life materials. GreenCircle provides third-party certification of sustainability claims through a rigorous scientific evaluation based on internationally recognized standards and guidelines.

6.2. Environment and Health During Installation

There are no relevant environmental or health effects relevant for Legacy® Scotchgard™ during installation.

6.3. Environment and Health During Use

Legacy® Scotchgard™ contain 3M™ Smog-Reducing Granules; these granules harness sunlight to photocatalytically convert smog (NO, NO₂) into water-soluble ions (NO₃), actively reducing air pollution.

6.4. Extraordinary Effects

Fire

Legacy® Scotchgard™ meets the requirements of ASTM E 108 Class 'A' for fire resistance.



ENVIRONMENTAL PRODUCT DECLARATION



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

Water

There are no relevant water extraordinary effects relevant for Legacy® Scotchgard™.

Mechanical Destruction

Legacy® Scotchgard™ meets the requirements of UL 2218 Class 4 Impact Resistance, ASTM D3161 Class F for Standard Testing Procedures for Wind Resistance, and Texas Department of Insurance Class 4 impact resistance.

6.5. Environmental Activities and Certifications

Malarkey's Portland, OR facility has achieved GreenCircle Certification for [Waste Diversion from Landfill certification](#), demonstrating responsible management of end-of-life materials.



Environment





Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

7. References

ASTM E 108 Class A, Standard Test Methods for Fire Tests of Roof Coverings, American Society for Testing and Materials, 2020.

ASTM D3161 Class F, Standard Test Method for Wind Resistance of Steep Slope Roofing Products (Fan-Induced Method), American Society for Testing and Materials.

GreenCircle Certified, LLC. *Waste Diversion for Landfill Certification: Guidelines for Qualifying and Quantifying Waste Diversion from Landfill Claims*. Rev 3. 2019.

ISO 14025:2006. Environmental labels and declarations — Type III environmental declarations — Principles and procedures.

ISO 14040: 2006/Amd1:2020 - Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2006/Amd1:2017/Amd2:2020 - Environmental management – Life cycle assessment – Requirements and guidelines

ISO 21930:2017 - Sustainability in buildings and civil engineering works — Core rules for environmental product declarations of construction products and services

Texas Department of Insurance. Class 4 impact resistance.

UL Environment General Program Instructions March 2022, version 2.7.

UL Environment (2018) Product Category Rules for Building-Related Products and Services Part A: Life Cycle Assessment Calculation Rules and Report requirements v3.2, 2018

UL Environment. Product Category Rule for Building-Related Products and Services: Part B – Asphalt Shingles, Built-up Asphalt Membrane Roofing and Modified Bituminous Membrane Roofing EPD Requirements. Version 1.2. 24/05/2021.

Wernet, G., Bauer, C., Steubing, B., Reinhard, J., Moreno-Ruiz, E., and Weidema, B., 2016. The ecoinvent database version 3 (part I): overview and methodology. *The International Journal of Life Cycle Assessment*, [online] 21(9), pp.1218–1230. Available at: <http://link.springer.com/10.1007/s11367-016-1087-8>

"U.S. Life Cycle Inventory Database." (2012). National Renewable Energy Laboratory, 2012. <https://www.lcacommons.gov/nrel/search>



ENVIRONMENTAL PRODUCT DECLARATION



Legacy® Scotchgard™ Shingles
Portland, OR Facility



According to ISO 14025
and ISO 21930:2017

8. Contact Information

8.1. Study Commissioner



Malarkey Roofing Products
P.O. Box 17217
Portland, OR 97217
Toll: (800) 545-1191
Tel: (503) 283-1191
Fax: (503) 289-7644
www.malarkeyroofing.com
<https://malarkeyroofing.com/contact-us>

8.2. LCA Practitioner



SustainableSolutions
CORPORATION

Sustainable Solutions Corporation
155 Railroad Plaza, Suite 203
Royersford, PA 19468 USA
(610) 569-1047
info@sustainablesolutionscorporation.com
www.sustainablesolutionscorporation.com

