



Malarkey
Roofing Products®



PRODUCT DATA GUIDE


PRODUCTS

STEEP SLOPE PRODUCTS

COLOR AVAILABILITY CHART	1
SHINGLES	2-4
STARTER SHINGLES	4
HIP AND RIDGE SHINGLES	5
UNDERLAYMENTS	6

LOW SLOPE PRODUCTS

COLOR AVAILABILITY CHART	7
FIBERGLASS BUILT-UP ROLL ROOFING	
CONVENTIONAL MULTI-PLY SYSTEMS	8
SBS POLYMER MODIFIED SYSTEMS	8
OMNISEAL® SELF-ADHERED SYSTEMS	9
BROADCAST (FINISH) GRANULES	9

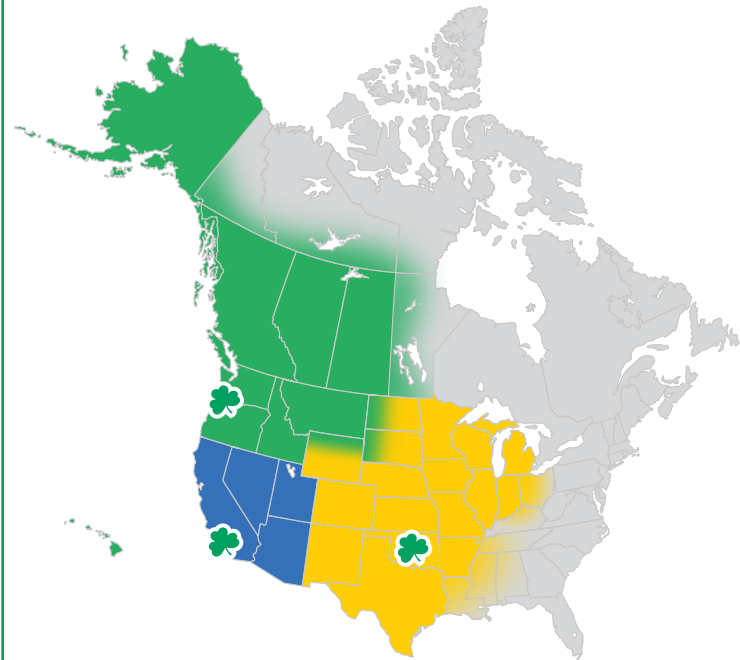

DISTRIBUTION LOCATIONS:

- Portland, OR
 - South Gate, CA
 - Oklahoma City, OK
- * For distribution outside the highlighted areas, please contact Malarkey Customer Service at 1 (800) 545-0182.

STOCK ITEMS AND COLORS

Stock items and colors are normally available from our inventories for regularly scheduled shipments. Lead times may vary based on seasonal demand.

FOR ADDITIONAL INFORMATION

Malarkey Roofing Products®
 PO Box 17217
 Portland, OR 97217
 (503) 283-1191 or (800) 545-1191
 Facsimile: (503) 289-7644
 Website: WWW.MALARKEYROOFING.COM

This information is effective May 2026 and supersedes all previously published data. Malarkey Roofing Products® reserves the right to change any information contained herein without notice. For the current version of product literature, go to WWW.MALARKEYROOFING.COM.

ORDER DESK AND TECHNICAL CONTACTS:

Customer Service Order Desk
malarkey.customerservice@amrize.com
 1 (800) 545-0182 or (503) 283-0182
 Facsimile: (503) 283-8069
 Hours: 6 am - 5 pm, Pacific Time

Technical Services
 1 (800) 545-1191 or (503) 283-1191
 Facsimile: (503) 283-5405
 Hours: 7 am - 5 pm, Pacific Time

NOTE: This information is subject to change. For the most up-to-date color availability, contact Customer Service or go to WWW.MALARKEYROOFING.COM.

COLOR AVAILABILITY	LAMINATE SHINGLES					SOLAR REFLECTIVE SHINGLE		DESIGNER SHINGLES	HIP AND RIDGE SHINGLES			
	241 Highlander®	242 Highlander® AR	251 Vista®	252 Vista® AR	273 Legacy® <small>Scotchgard</small>	245 Highlander® Cool	255 Vista® Cool	285 Windsor® <small>Scotchgard</small>	222 8" EZ-Ridge® <small>Scotchgard</small>	224 10" EZ-Ridge® XT <small>Scotchgard</small>	225 10" RidgeFlex® <small>Scotchgard</small>	227 12" RidgeFlex® <small>Scotchgard</small>
Antique Brown	●	●●●	●	●●●	●●●			●●●	●	●●●	●●●	●●●
Black Oak	●	●●●	●	●●●	●●●			●●●	●	●●●	●●●	●●●
Brilliant Black		●		●	●					●		●
Burlwood						●			●			
Golden Amber	●								●	●	●	
Heather	●	●●●	●	●●●	●●●			●●●	●	●●●	●●●	●●●
Ivory Mist	●								●	●	●	
Midnight Black	●	●	●	●	●●			●●●	●	●●	●●	●●
Moonlit Black						●	●		●	●		
Natural Wood	●	●●●	●	●●●	●●●			●●●	●	●●●	●●●	●●●
Riverstone Grey						●	●		●	●		
Sienna Blend	●	●●●	●	●●●	●●●				●	●●●	●●●	●●●
Silverwood	●	●●●	●	●●●	●●●				●	●●●	●●●	●●●
Storm Grey	●	●●●	●	●●●	●●●			●●●	●	●●●	●●●	●●●
Weathered Wood	●	●	●	●	●●			●●●	●	●●	●●	●●
Weathered Wood Plus		●		●	●					●		●
Willow Wood						●	●		●	●		

NEX® Laminated Architectural Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION

TESTING & APPROVALS

SPECIFICATIONS

241 Highlander®

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 3 Impact Resistant



ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
FBC Approval - FL36890
Listed in various fire assemblies




Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5 5/8" (143 mm)
Squares/Pallet: 16

Highlander® colors *Golden Amber, Ivory Mist, Sienna Blend* and *Silverwood* have measured radiative property values listed with CRRC¹ and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements. SRI: 21 (Golden Amber); 26 (Ivory Mist); 20 (Sienna Blend); 21 (Silverwood)

242 Highlander® AR

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- 15-Year Algae Resistant System Warranty*
- Class 3 Impact Resistant



ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438
CSA A123.5
FBC Approval - FL36890
Listed in various fire assemblies



Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5 5/8" (143 mm)
Squares/Pallet: 16

245 Highlander® Cool

- NEX® Polymer Modified Asphalt
- Limited Lifetime Shingle Warranty
- 110 mph (177 kph) Limited Wind Warranty
- 130 mph (209 kph) Enhanced Wind Warranty available
- Class 3 Impact Resistant



ASTM D7158 Class H
ASTM D3462
ASTM D3161 Class F
ASTM D3018 Type I
UL 2218 Class 3
ICC Approval - ESR-3150
ICC-ES AC438; CSA A123.5
Listed in various fire assemblies



Shingles/Sq.: 66
Bundles/Sq.: 3
Exposure: 5 5/8" (143 mm)
Squares/Pallet: 16

Highlander® Cool shingles have measured radiative property values listed with CRRC and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements.

245 Highlander® Cool	Solar Reflectance ¹		Thermal Emittance ¹		Solar Reflective Index ¹	
	Initial	Weathered	Initial	Weathered	Initial	Weathered
Burlwood	0.21	0.21	0.91	0.94	20	22
Moonlit Black	0.20	0.20	0.92	0.92	20	20
Riverstone Grey	0.20	0.20 [†]	0.92	0.92 [†]	20	20 [†]
Willow Wood	0.20	0.20	0.92	0.92	20	20



¹ Results are CRRC listings unless marked otherwise.



[†] Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.



*Warranty coverage is limited solely to blue-green algae (*Gloeocapsa magma*). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with Malarkey Algae Resistant (AR) shingles to receive Malarkey's limited algae resistant roof system warranty.

NEX® Laminated Architectural Shingles (cont.)

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
<p>251 Vista®</p> <ul style="list-style-type: none"> NEX® Polymer Modified Asphalt Limited Lifetime Shingle Warranty 110 mph (177 kph) Limited Wind Warranty 130 mph (209 kph) Enhanced Wind Warranty available Class 4 Impact Resistant 	<p>ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438; CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies</p>	<p>Shingles/Sq.: 66 Bundles/Sq.: 3 Exposure: 5⅝" (143 mm) Squares/Pallet: 16</p>
  <p>Featuring The Zone,® Malarkey's Patented Nailing Area</p>	<p>Vista® colors <i>Sienna Blend</i> and <i>Silverwood</i> have measured radiative property values listed with CRRC¹ and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements. SRI: 20 (Sienna Blend); 20 (Silverwood)</p>	

<p>252 Vista® AR</p> <ul style="list-style-type: none"> NEX® Polymer Modified Asphalt Limited Lifetime Shingle Warranty 110 mph (177 kph) Limited Wind Warranty 130 mph (209 kph) Enhanced Wind Warranty available 25-Year Algae Resistant System Warranty* Class 4 Impact Resistant 	<p>ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438 CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies</p>	<p>Shingles/Sq.: 66 Bundles/Sq.: 3 Exposure: 5⅝" (143 mm) Squares/Pallet: 16</p>
  <p>Featuring The Zone,® Malarkey's Patented Nailing Area</p>		

<p>255 Vista® Cool</p> <ul style="list-style-type: none"> NEX® Polymer Modified Asphalt Limited Lifetime Shingle Warranty 110 mph (177 kph) Limited Wind Warranty 130 mph (209 kph) Enhanced Wind Warranty available Class 4 Impact Resistant 	<p>ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438; CSA A123.5 Listed in various fire assemblies</p>	<p>Shingles/Sq.: 66 Bundles/Sq.: 3 Exposure: 5⅝" (143 mm) Squares/Pallet: 16</p>
  <p>Featuring The Zone,® Malarkey's Patented Nailing Area</p>	<p>Vista® Cool shingles have measured radiative property values listed with CRRC and can be used to comply with California Energy Code Title 24, Part 6 Cool Roof Requirements.</p>	

255 Vista® Cool	Solar Reflectance ¹		Thermal Emittance ¹		Solar Reflective Index ¹	
	Initial	Weathered	Initial	Weathered	Initial	Weathered
Moonlit Black	0.20	0.20	0.92	0.92	20	20
Riverstone Grey	0.20	0.20†	0.92	0.92†	20	20†
Willow Wood	0.20	0.20	0.92	0.92	20	20




¹ Results are CRRC listings unless marked otherwise.

¹ Solar reflectance data calculated using the California Energy Commission SRI Calculation Worksheet.

*Warranty coverage is limited solely to blue-green algae (*Gloeocapsa magma*). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with Malarkey Algae Resistant (AR) shingles to receive Malarkey's limited algae resistant roof system warranty.

NEX® Laminated Architectural Shingles (cont.)




See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
<p>273 Legacy® </p> <ul style="list-style-type: none"> NEX® Polymer Modified Asphalt Limited Lifetime Shingle Warranty 110 mph (177 kph) Limited Wind Warranty 130 mph (209 kph) Enhanced Wind Warranty available Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438 CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies</p>  	<p>Shingles/Sq.: 64 Bundles/Sq.: 4 Exposure: 5 5/8" (143 mm) Squares/Pallet: 12</p>





NEX® Designer Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
<p>285 Windsor® </p> <ul style="list-style-type: none"> NEX® Polymer Modified Asphalt Limited Lifetime Shingle Warranty 110 mph (177 kph) Limited Wind Warranty 140 mph (225 kph) Enhanced Wind Warranty available Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D7158 Class H ASTM D3462 ASTM D3161 Class F ASTM D3018 Type I UL 2218 Class 4 ICC Approval - ESR-3150 ICC-ES AC438 CSA A123.5 FBC Approval - #14809 Listed in various fire assemblies</p>  	<p>Shingles/Sq.: 65 Bundles/Sq.: 5 Exposure: 5 3/4" (146 mm) Squares/Pallet: 6</p>









Starter Shingles

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING/COLOR
<p>210 Smart Start®</p> <ul style="list-style-type: none"> Full-width starter shingle separates at perforation to provide two, full-size starter shingles with seal-down NEX® Polymer Modified Asphalt Meets requirements of: ASTM D3462; ASTM D3161 Class F; ASTM E108 Class A 	<p>Shingles/Bundle: 18 full-size (36 pieces) Linear Ft./Bundle: 114' 9" (35 m) Width: 16 3/8" (416 mm) full-size 8 3/16" (208 mm) per piece Length: 38 1/4" (972 mm) full-size 38 1/4" (972 mm) per piece Bundles/Pallet: 21</p>	<p>Mineral surfaced</p>
<p>212 Windsor® Starter </p> <ul style="list-style-type: none"> Full-width starter shingle blended to match the Windsor® shingle NEX® Polymer Modified Asphalt Limited Lifetime Scotchgard™ Protector Warranty* Meets requirements of ASTM D3462 and UL 2218 Class 4 	<p>Shingles/Bundle: 22 Linear Coverage: 70' (21.3 m) Width: 13 1/4" (337 mm) Length: 38 1/4" (972 mm) Bundles/Pallet: 24</p> 	<p>Shingle Colors match 285 Windsor® (Antique Brown, Black Oak, Midnight Black, Heather, Natural Wood, Storm Grey and Weathered Wood)</p>

*Warranty coverage is limited solely to blue-green algae (*Gloeocapsa magma*). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with shingles having Scotchgard™ Protector to receive Malarkey's Limited Lifetime Scotchgard™ Protector Warranty.






NEX® Hip and Ridge Shingles


PRODUCT DESCRIPTION	TESTING & APPROVALS	SPECIFICATIONS
<p>222 EZ-Ridge® </p> <ul style="list-style-type: none"> NEX® Polymer Modified Hip and Ridge Shingle with Seal-Down 8" High-Profile, Decorative Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D3161 Class F UL 2218 Class 4 ICC Approval - ESR-3150 FBC Approval - #14809 Listed in various fire assemblies</p> 	<p>Shingles/Box.: 30 Ln. Coverage: 20' (6.1 m) Exposure: 8¼" (210 mm) Width: 8" (203 mm) Boxes/Pallet: 42</p>
<p>224 EZ-Ridge® XT </p> <ul style="list-style-type: none"> NEX® Polymer Modified Hip and Ridge Shingle with Seal-Down 10" High-Profile, Decorative Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D3161 Class F UL 2218 Class 4 ICC Approval - ESR-3150 FBC Approval - #14809 Listed in various fire assemblies</p> 	<p>Shingles/Box.: 30 Ln. Coverage: 20' (6.1 m) Exposure: 8¼" (210 mm) Width: 10" (254 mm) Boxes/Pallet: 42</p>
<p>225 10" RidgeFlex® </p> <ul style="list-style-type: none"> NEX® Polymer Modified Hip and Ridge Strips Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D7158 Class H; ASTM D3462 ASTM D3161 Class F UL 2218 Class 4; CSA A123.5 ICC Approval - ESR-3150 Listed in various fire assemblies</p>  <p>Bundles/Pallet: 48</p>	<p>Units/Bundle: 88 Shingles/Bundle: 22 Ln. Coverage: 41'3" (12.6 m) Exposure: 5⅝" (143 mm) A scored strip is 13¼" (337 mm) tall x 9⅞" (251 mm) wide with seal-down for 5⅝" (143 mm) exposure</p>
<p>227 12" RidgeFlex® </p> <ul style="list-style-type: none"> NEX® Polymer Modified Hip and Ridge Strips Limited Lifetime Scotchgard™ Protector Warranty* Class 4 Impact Resistant 	<p>ASTM D7158 Class H; ASTM D3462 ASTM D3161 Class F UL 2218 Class 4; CSA A123.5 ICC Approval - ESR-3150 Listed in various fire assemblies</p>  <p>Bundles/Pallet: 48</p>	<p>Units/Bundle: 66 Shingles/Bundle: 22 Ln. Coverage: 30'11" (9.4 m) Exposure: 5⅝" (143 mm) A scored strip is 13¼" (337 mm) tall x 12" (305 mm) wide with seal-down for 5⅝" (143 mm) exposure</p>

*Warranty coverage is limited solely to blue-green algae (*Gloeocapsa magma*). No other algae or biological growths are covered. Malarkey hip and ridge shingles (10", 12" RidgeFlex® or 8", 10" EZ-Ridge® with Scotchgard™ Protector from 3M) are recommended for all Malarkey field shingles but required with shingles having Scotchgard™ Protector to receive Malarkey's Limited Lifetime Scotchgard™ Protector Warranty.

Underlayments

See page 1 for color availabilities and distribution locations.

PRODUCT DESCRIPTION & TESTING & APPROVALS	SPECIFICATIONS	SURFACING
<p>Right Start® UDL</p> <ul style="list-style-type: none"> NEX® Polymer Modified Fiberglass Underlayment ASTM D4601 Type II; ASTM D4869; ASTM D226 Type II; ASTM D6757 Type II; ICC Approval - ESR-1561; FBC Approvals - #14807 & #15214; Listed in various fire assemblies 	<p>Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39³/₈" (1 m) Length: 66' (20.1 m) Thickness: 50 mils Rolls/Pallet: 30</p> 	<p>Mineral fines</p>
<p>401 Arctic Seal®</p> <ul style="list-style-type: none"> Self-Adhering, NEX® Polymer Modified, Steep Slope Underlayment Ice and Water Protection ASTM D1970; ASTM E108 Class A Listed in various fire assemblies FM Approved 	<p>Approx. Wt./Roll: 60 lbs. (27.2 kg) Coverage (approx.): 2 square Width: 36" (0.91 m) Length: 65' (19.8 m) Thickness: 65 mils Rolls/Pallet: 25</p> 	<p>Mineral fines, top; asphalt-based adhesive, bottom; release film protects adhesive</p>
<p>406 Secure Start® HT</p> <ul style="list-style-type: none"> Self-Adhering, High Temperature Underlayment Ice and Water Protection ASTM D1970; ASTM E108 Class A Class I Impermeable Vapor Retarder Intertek CCRR-1082; FBC Approval - FL41901 	<p>Approx. Wt./Roll: 50 lbs. (23 kg) Coverage (approx.): 2 square Width: 36" (0.91 m) Length: 67' (20.4 m) Thickness: 48 mils Rolls/Pallet: 25</p>	<p>Slip-resistant surface, top; asphalt-based adhesive, bottom; release film protects adhesive</p>
<p>1029 Secure Start® Lite</p> <ul style="list-style-type: none"> Lightweight, Synthetic Steep Slope Underlayment ICC-ES AC188; ASTM D226, D4869 and D8257 ASTM E108 Class A; Intertek CCRR-0537 CAN/CSA A220.1; FBC Approval - FL23186 	<p>Approx. Wt./Roll: 24 lbs. (10.9 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Thickness: 7 ±1 mils Rolls/Pallet: 56</p> 	<p>Non-woven, anti-skid surface; anti-slip coating on bottom</p>
<p>1031 Secure Start® Plus</p> <ul style="list-style-type: none"> Lightweight, Synthetic Steep Slope Underlayment ASTM D226 Types I & II, D4869 Types II & IV, and D8257 ASTM E108 Class A; Intertek CCRR-1082 CAN/CSA A123.3; FBC Approval - FL23186 	<p>Approx. Wt./Roll: 32 lbs. (14.5 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Rolls/Pallet: 36</p> 	<p>Raised non-woven, anti-skid surfaces, top and bottom</p>
<p>1040 Secure Start® Permeable</p> <ul style="list-style-type: none"> Lightweight, Synthetic Steep Slope Underlayment ICC-ES AC188; ASTM D8257 and E108 Class A Meets physical properties of ASTM D4869 Intertek CCRR-0537; CAN/CSA A220.1; FBC Approval - FL23186 	<p>Approx. Wt./Roll: 36 lbs. (16.5 kg) Coverage: 10 square Width: 48" (1.2 m) Length: 250' (76.2 m) Thickness: 32 mils Rolls/Pallet: 20</p> 	<p>Raised non-woven, anti-skid surfaces, top and bottom</p>

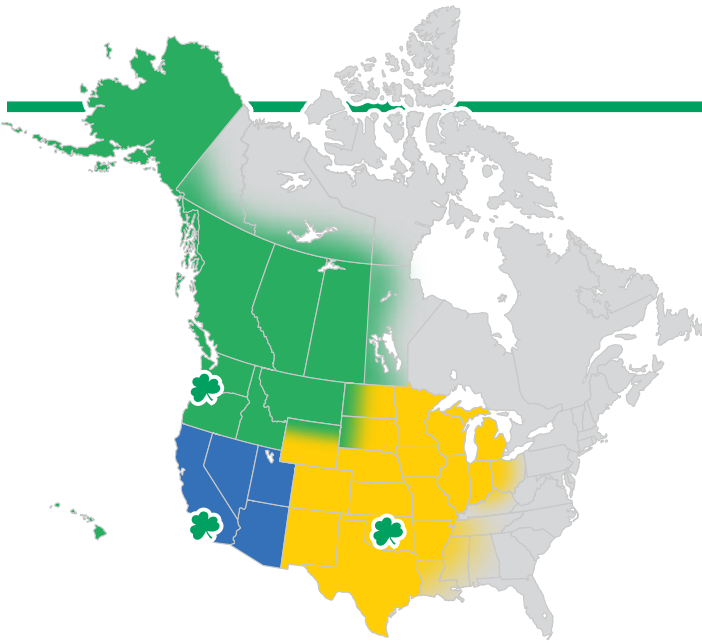

NOTE: This information is subject to change. For the most up-to-date color availability, contact Customer Service or go to WWW.MALARKEYROOFING.COM.

DISTRIBUTION LOCATIONS:

- Portland, OR
 - South Gate, CA
 - Oklahoma City, OK
- * For distribution outside the highlighted areas, please contact Malarkey Customer Service at 1 (800) 545-0182.

DISTRIBUTED FROM: ● PORTLAND, OR* ● SOUTH GATE, CA* ● OKLAHOMA CITY, OK* *VARIES BASED ON LOCATION	PANO™ CAP SHEET		PARAGON® MODIFIED CAP SHEETS		OMNISEAL® MODIFIED CAP SHEETS	
	502 Pano™ Cap		350 Paragon® CHROMA Cap	601 Paragon® MOD Cap		430 OmniSeal® Cap
COLOR AVAILABILITY						
Antique Brown			● ●			● ● ●
Dove White	● ●		● ● ●	● ●		● ● ● ●
Midnight Black			● ●			● ● ● ●
Sienna Blend			● ●			● ● ● ●
Storm Grey			● ●			● ● ● ●
Tan/Buff						● ● ● ●
Weathered Wood			● ●			● ● ● ●

Base Sheet for Conventional Multi-Ply Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING
515 Pano™ Base <ul style="list-style-type: none"> Fiberglass Reinforced Base Sheet ASTM D4601 Type II Listed in various fire assemblies FM Approved; Intertek CCRR-0333 	Approx. Wt./Roll: 75 lbs. (34.2 kg) Coverage: 3 square Width: 39 ³ / ₈ " (1 m) Length: 99' (30.2 m) Rolls/Pallet: 20	Mineral fines

Cap Sheet for Conventional Multi-Ply Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	COLORS
502 / 502-S Pano™ Cap <ul style="list-style-type: none"> Fiberglass Reinforced Cap Sheets ASTM D3909; UL 55A Type G3 Listed in various fire assemblies FM Approved; Intertek CCRR-0333 	Approx. Wt./Roll: 75 lbs. (34 kg) Coverage: 1 square Width: 39 ³ / ₈ " (1 m) Length: 33' (10.1 m) Rolls/Pallet: 30 SKU 502 is fully granulated with a painted 2" (51 mm) lay line. SKU 502-S has a 2" (51 mm) sand selvage.	See Color Chart, Page 8

SBS Polymer Modified Base and Ply Sheets for use in all PMR Systems




PRODUCT DESCRIPTION & TESTING & APPROVALS	SPECIFICATIONS	SURFACING
501 Paragon® MOD Base <ul style="list-style-type: none"> SBS Polymer Modified Fiberglass Base Sheet ASTM D4601 Type II Listed in various fire assemblies FM Approved; Intertek CCRR-0333 	Approx. Wt./Roll: 92 lbs. (41.7 kg) Coverage: 3 square Width: 39 ³ / ₈ " (1 m) Length: 99' (30.2 m) Rolls/Pallet: 20	Mineral fines, top and bottom

SBS Polymer Modified Cap Sheets for use in all PMR Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	COLORS*
350 Paragon® CHROMA Cap <ul style="list-style-type: none"> SBS Polymer Modified Granule-Surfaced Fiberglass Cap Sheet ASTM D3909; ASTM D4869; ASTM D6757 Listed in various fire assemblies Intertek CCRR-0333 	Approx. Wt./Roll: 78 lbs. (35.4 kg) Coverage: 1 square Width: 39 ³ / ₈ " (1 m) Length: 33' (10.1 m) Rolls/Pallet: 30	See Color Chart, Page 8
601 Paragon® MOD Cap <ul style="list-style-type: none"> SBS Polymer Modified Granule-Surfaced Fiberglass Cap Sheet ASTM D3909 Listed in various fire assemblies FM Approved; Intertek CCRR-0333 	Approx. Wt./Roll: 100 lbs. (45.4 kg) Coverage: 1 square Width: 39 ³ / ₈ " (1 m) Length: 34' (10.4 m) Rolls/Pallet: 25	See Color Chart, Page 8

*Color availability varies based on location.

OmniSeal® SBS Polymer Modified Self-Adhered Systems

PRODUCT DESCRIPTION & TESTING	SPECIFICATIONS	SURFACING
<p>410 OmniSeal® Base</p> <ul style="list-style-type: none"> SBS Polymer Modified Fiberglass Base Sheet ASTM D4601 Type II; ASTM E108 Class A Fire Rating Listed in various fire assemblies 	 <p>Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39³/₈" (1 m) Length: 66' (20.1 m) Rolls/Pallet: 20</p>	Smooth-surfaced nailable base
<p>420 OmniSeal® Ply</p> <ul style="list-style-type: none"> SBS Polymer Modified Self-Adhering Fiberglass Base/Ply Sheet ASTM D1970; ASTM D4601; ASTM E108 Class A Fire Rating Listed in various fire assemblies FM Approved 	 <p>Approx. Wt./Roll: 80 lbs. (36.3 kg) Coverage: 2 square Width: 39³/₈" (1 m) Length: 66' (20.1 m) Rolls/Pallet: 20</p>	Smooth-surfaced self-adhering ply sheet
<p>430 OmniSeal® Cap</p> <ul style="list-style-type: none"> SBS Polymer Modified Self-Adhering Fiberglass Cap Sheet ASTM D3909; ASTM D7530; ASTM E108 Class B Fire Rating; UL 2218A Class 4 Impact Resistant Listed in various fire assemblies 	 <p>Approx. Wt./Roll: 78 lbs. (35.4 kg) Coverage: 1 square Width: 39³/₈" (1 m) Length: 34' (10.4 m) Rolls/Pallet: 20</p>	Granule-surfaced self-adhering cap sheet See Color Chart, Page 8 (Other colors available upon request*)

Broadcast (Finish) Granules

PRODUCT DESCRIPTION	SPECIFICATIONS	COLOR
<p>2200 Standard Granules</p> <ul style="list-style-type: none"> High quality roofing granules for use on asphalt bleed-out at overlap seams between rolls on a low slope roof. 	<p>Packaging: 5 gal (18.9 L) containers Approx. Wt.: 50 lbs. (22.7 kg)</p>	Various; contact Customer Service for availability.
<p>2200R Reflective Granules</p> <ul style="list-style-type: none"> High quality, solar reflective granules for use on asphalt bleed-out from application of Malarkey reflective cap sheets. 	<p>Packaging: 5 gal (18.9 L) containers Approx. Wt.: 50 lbs. (22.7 kg)</p>	Solar White

*Color availability varies based on location.



P.O. Box 17217
Portland, OR 97217-0217

Rev. 05/26